

Panattoni Park Dunajská Streda








CLOSE TO E575 MOTORWAY. PERFECT CONNECTION TO AT, HU, CZ



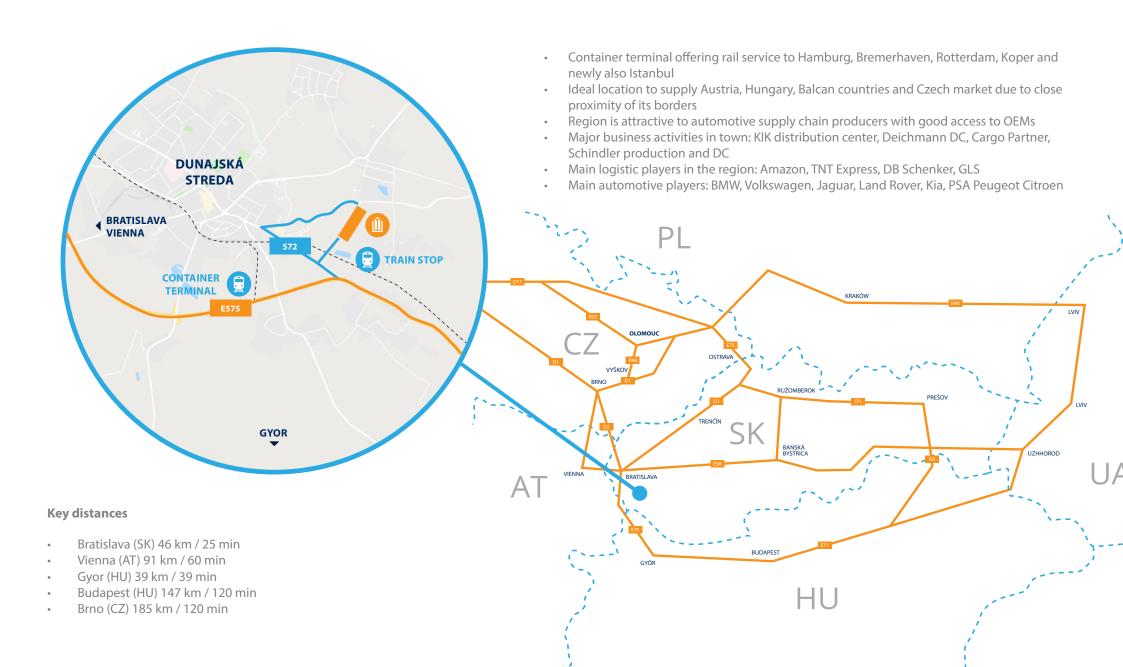

STANDARD TECHNICAL SPECIFICATION



SUPPORTING STRUCTURE

- · Pad or pilot foundations, insulated plinth panels up to 300 mm above floor
- · Prefabricated concrete columns in min. 12x 24 m grid or per layout
- Prefabricated concrete or steel roof beams, clear height of 12 m

FLOOR

- · Fibre reinforced concrete floor, PE membrane, cut joints, 180 mm thick, surface treated
- Load capacity of 50 kN/sq m, 60 kN point load
- Flatness according to DIN 1822, table 3, line 3

ROOF

- · Corrugated steel sheets, mineral wool insulation, TPO membrane
- Free load capacity of 20 kg/sg m for clients installations
- Min. 2% of skylights in warehouse area
- Syphonic drainage system, emergency overflows

FACADE

- · Horizontal sandwich panels with mineral wool insulation, 150 mm thick
- · Triple glazed windows in offices

DOCKS

- 1x electrically operated 3.0 x 3.2 m dock for each 1.000 sq m of hall
- Each dock equipped with hydraulic leveller, 60 kN capacity, PE shelter, wheel guides
- 1x electrically operated 4.0 x 5.0 m drive-in gate for each 6,500 sq m of hall



- ESFR sprinklers under roof, FM Global certified tank and pumps
- 200 lux LED lighting (excluding influence of clients installations)
- 1x 630 kVA dry transformer station per each 25,000 sq m of hall
- code for manufacturing (assembly)
- 300 lux LED lighting (excluding influence of clients installations)
- Increased percentage of skylights area
- day room, excl. furniture and appliance
- Aluminium entrance door with canopy to entrance lobby
- Tiles, carpets or PVC floor surfaces, suspended mineral ceiling panels
- Social rooms with ceramic fixtures, wall tiles, and basic accessories
- PVC cable trays below windows, 2x 220 V socket each 8 sq m • Server room with 2 split units and antistatic PVC floor
- · Top cooling in office rooms and meeting rooms

- for drainage
- 2 m high mesh fence, entrance barriers and automatic gate
- Green areas with grass, bushes, and trees
- Cycle shelters, rest area, smooking shelters

DEVELOPMENT CONCEPT



TOTAL BUILT-UP AREA 135,290 sq m

Building A 135,290 sq m

Parking places 303
Truck parking places 47
Docks 148
Drive-ins 20

SUSTAINABILITY TRENDS

LED lighting

BREEAM Very Excellent certified


WAREHOUSE

Column grid 12 m x 24 m
Light intensity in the hall 200 lux
Skylights min 2%
Floor loading 5 t/sq m
Clear height 13.4 m

OFFICE PREMISES

Clear height 2.7 m Light intensity 500 lux

Build-to-suit

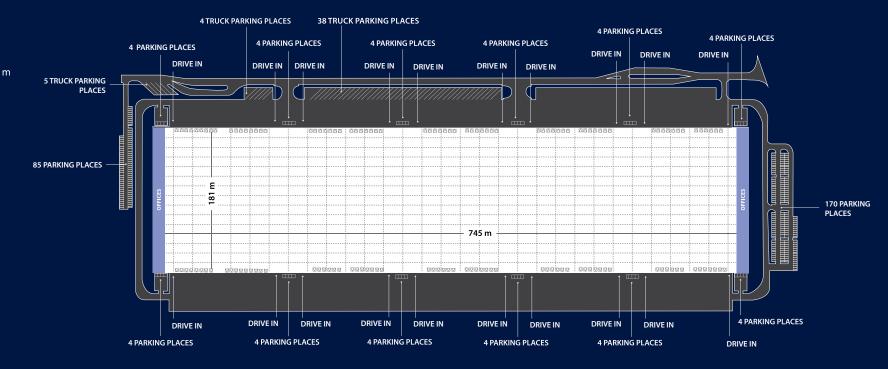







Panattoni Worldwide International vision. Local focus.

With an expansive international platform, Panattoni Development Company, Inc. specializes in industrial, office and build-to-suit development. Our 31 offices in the United States, Canada and Europe are responsible for the development of approximately 30 million square meters. Each office is rooted in the local community with strong partnerships that produce the best results for our clients in each region. You can find us in Poland, Great Britain, the Czech Republic, Slovakia, Germany and Luxembourg.

CZECH REPUBLIC

Panattoni

Šporkovský palác, V Celnici 1034/6 110 00 Prague 1 Czech Republic

czinfo@panattoni.com www.panattoni.cz www.panattonieurope.com/cz

SLOVAKIA Panattoni

Panattoni

Eurovea Central 1, Pribinova 4 811 09 Bratislava Slovakia

skinfo@panattoni.com www.panattoni.com www.panattonieurope.com/sk