

Panattoni Park Týniště









GREAT ACCESSIBILITY FROM D11 AND D35 HIGHWAYS



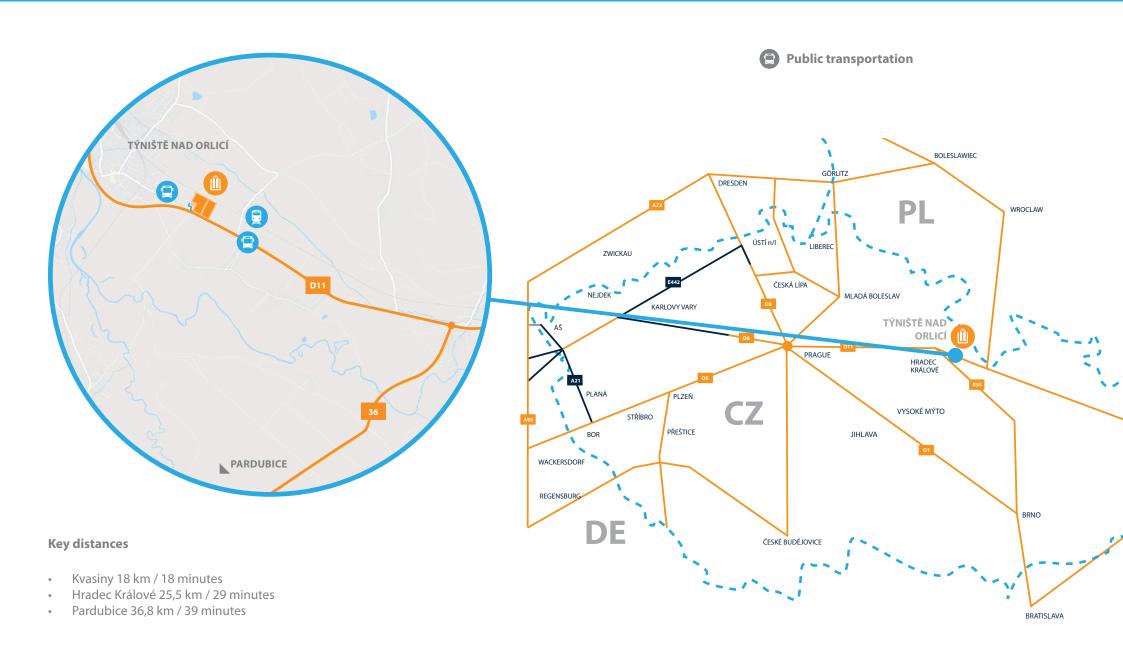

ABOUT LOCATION



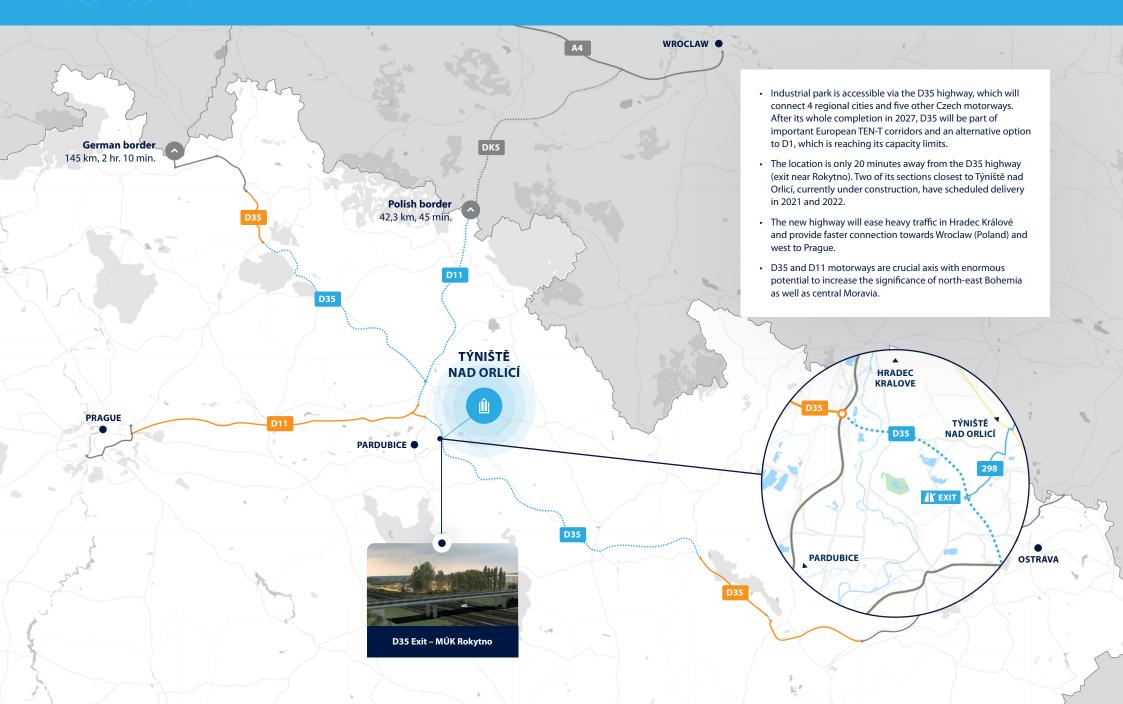

TECHNICAL STANDARD SPECIFICATION



SUPPORTING STRUCTURE

- · Pad or pilot foundations, insulated plinth panels up to 30 cm above floor
- Prefabricated concrete columns in 12 x 24 m grid or per layout
- · Prefabricated concrete or steel roof beams, clear height of 10 m

FLOOR

- · Fibre reinforced concrete floor, PE membrane, cut joints, 18 cm thick, surface treated with hardener
- Load capacity of 50 kN/sq m, 60 kN point load
- Flatness according to DIN 1822, table 3, line 3

ROOF

- · Corrugated steel sheets, mineral wool insulation, PVC membrane
- Free load capacity of 15 kg/sq m for clients installations
- · Min. 2 % of skylights in warehouse area
- · Syphonic drainage system, emergency overflows

FACADE

- Horizontal sandwich panels with mineral wool insulation
- Prefabricated concrete facade around docks to approx. 4.5 m height
- Double glazed windows in offices with insulated PVC profiles

DOCKS

- 1x electrically operated 3 x 3.2 m dock for each 1 000 sq m of hall
- Each dock equipped with hydraulic leveller, 60 kN capacity, PE shelter, wheel guides
- 1x electrically operated 3.5 x 4.2 m drive-in gate for each 5 000 sg m of hall



- ESFR sprinklers under roof, FM Global certified tank and pumps
- 200 lux LED lighting (excluding influence of clients installations)
- 1x 630 kVA dry transformer station per each 25 000 sq m of hall
- code for manufacturing (assembly)
- 300 lux LED lighting (excluding influence of clients installations)
- · Increased percentage of skylights area
- Aluminium entrance door with canopy to entrance lobby
- Tiles, carpets or PVC floor surfaces, suspended mineral
- · Social rooms with ceramic fixtures, wall tiles, and basic accessories
- PVC cable trays below windows, 2x 220 V socket per work place
- · Server room with 2 split units and antistatic PVC floor
- Top cooling

- 2 m high mesh fence, entrance barriers and manual gate
- Green areas with grass, brushes, and trees

DEVELOPMENT CONCEPT



5 TRUCK SPRINKLER PARKING PLACES **TOTAL BUILT-UP AREA OFFICE PREMISES** 16,297 sq m 2.7 m Clear height **Building** 16,297 sq m Light intensity 500 lux 25 LOADING 115 Car parking places Build to suit DOCKS Truck parking places 8 65 PARKING **PLACES** Docks 25 **BUILDING STANDARDS Drive-ins** Clear height 10 m Loading docks 1/800 sq m **SUSTAINABILITY TRENDS** Floor loading capacity 5 t/sq m LED lighting PARK **BREEAM Excellent certified** ENTRANCE • ESFR sprinkler system Parking areas for cars
Truck loading yard WAREHOUSE 12 m x 24 m Column grid • Office space with facilities according Light intensity in the hall 200 lux to the clients requirements Skylights min 2% Floor loading 5 t/sq m 3 TRUCK PARKING PLACES **GUARDHOUSE**







Panattoni Worldwide International vision. Local focus

With an expansive international platform, Panattoni Development Company, Inc. specializes in industrial, office and build-to-suit development. Our 31 offices in the United States, Canada and Europe are responsible for the development of approximately 30 million square meters. Each office is rooted in the local community with strong partnerships that produce the best results for our clients in each region. You can find us in Poland, Great Britain, the Czech Republic, Slovakia, Germany and Luxembourg.

CZECH REPUBLIC Panattoni

Šporkovský palác, V Celnici 1034/6 110 00 Prague 1 Czech Republic

czinfo@panattoni.com www.panattoni.cz www.panattonieurope.com/cz

SLOVAKIA Panattoni

Eurovea Central 3, Pribinova 10 811 09 Bratislava Slovakia

skinfo@panattoni.com www.panattoni.com www.panattonieurope.com/sk